



DECADE

Features

- Input voltage: 220–240 V AC, 50/60 Hz
- Input voltage range: 198–264 V AC
- Electrical protection class 1
- IP: 54
- IK: 10 / 20 joules
- IRC 80
- Incandescent wire test 850° / 30 s
- Rated ambient operating temperature: 25 °C to NF EN 60598-1 standard
- VK22
- SDCM (Standard Deviation Colour Matching): 5
- LED module life > 50,000 hr (L70B50)
- Photobiological hazard: RG0

Applications

- Architectural LED bollard, subject to moderate vandalism
- Installation positions: refer to installation instructions

Materials

- Body and head in aluminium treated against corrosion
- Clear polycarbonate diffuser
- Acrylic reflector
- RoHS: the products contain no prohibited substances as defined in the European Directive 2002/95/UE and amendments

Colours / Finish

- Colour: matt black RAL 9005

Wiring

- Supply terminal block: screw terminal, for 2.5 mm² conductors

Fixings

- Hexagon socket screws

Technical data sheet

Decade - FT0217-A4-E

Facilities available

(must be ordered separately)


- Standard anchoring: code: **9885 0001**
- or**
- Reinforced anchoring for embedding into concrete: code: **9885 0002 (VK25)**

Approvals

Certificates available:

- CE certificate (as per EN60598-1 / 2-1)
- Incandescent Wire Test certificate (depending on product)

Dimensions

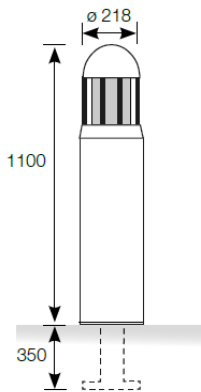

Decade LED bollard (no anchoring)						
Designation	CCT (K)	Power (W)	Luminaire Output (lm)	Luminaire Efficacy (lm/W)	Height (mm)	Code
Decade	4000	30	935	31,2	1100	85002400

Standard anchoring: code: **9885 0001**

or

Reinforced anchoring for embedding into concrete: code: **9885 0002 (VK25)**

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.