

SERENITY - LED PANELS



VERDE LED
ENERGY SAVING LIGHTING SOLUTIONS



FEATURES & BENEFITS

- High quality construction
- High efficacy
- Low glare option

Mechanical:

Ingress Protection: IP54 as standard. (Driver IP20)
Construction: Ultra slim and light Alu frame.
Mounting: Recessed, surface-mounted or suspended.
Working Temperature: -35°C - +40°C

Electrical:

Input Voltage: Non-Dimmable 200-240VAC (50-60Hz).
 Dimmable 100-277VAC (50-60Hz)
Power Factor: 0.9
Driver: Lifud external (Dimmable 1-10V, DALI available on request)




Photometric:

CCT: 4000K as standard (3000K, 5000K available on request).
Beam Options: 110°
CRI: 80
LED Light Source: Epistar
Lumen Maintenance: L70B10 > 60,000 hrs.

Certifications:



Dimensions:

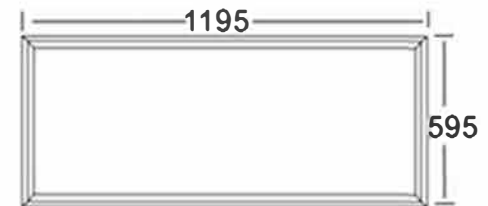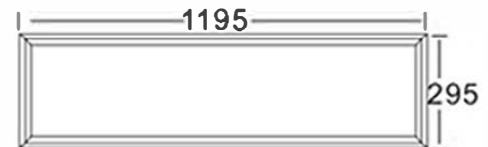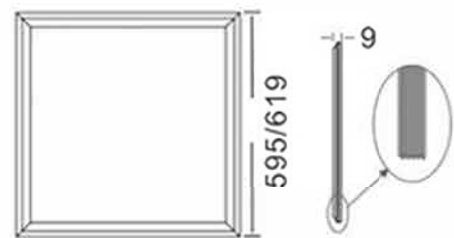

CODE	POWER	CCT	LUMINOUS FLUX	BEAM ANGLE	DIMENSIONS
VER-XP6060-32-840	32W	4000K	3,470 lm	110°	595x595x9 mm
VER-XP6262-32-840	32W	4000K	3,470 lm	110°	619x619x9 mm
VER-XP30120-50-840	50W	4000K	5,430 lm	110°	1195x295x9 mm
VER-XP60120-70-840**	70W	4000K	7,610 lm	110°	1195x595x9 mm

* Where "X" denotes the driver type: "E" for non-dimmable, "DIM" for 1-10V dimmable, and "DALI" for DALI dimmable.

** Not available in non-dimmable.

*** Specifications subject to change without notice.